

Compact Fittings



Features

- * Ultra-compact design, ideal for small equipment and installations in confined spaces.
- * Compact body and reduced outside diameter while maintaining the same flow performance as standard fittings.
- * Nickel-plated finish for superior corrosion resistance.
- * Oval-shaped release sleeve enables easy tube handling, even in tight spaces.
- * One-touch tube insertion ensures quick and secure connection.
- * Threaded ports are fitted with both a gasket and an O-ring to ensure excellent sealing performance

How to order

TPL 04 - 01 S C



1 Model

2 Applicable Tube O. D.

04 : Ø4

06 : Ø6

3 Port Size


M3 : M3 x 0.5

M5 : M5 x 0.8


Standard Specifications

Fluid	Air
Working pressure	0~150psi (0~9.9kgf/cm ²) * In combination with the applied tube, it is based on the maximum operating pressure of the tube
Working temperature	0~60 °C
Applicable tube O.D.	Ø4, Ø6

Structure

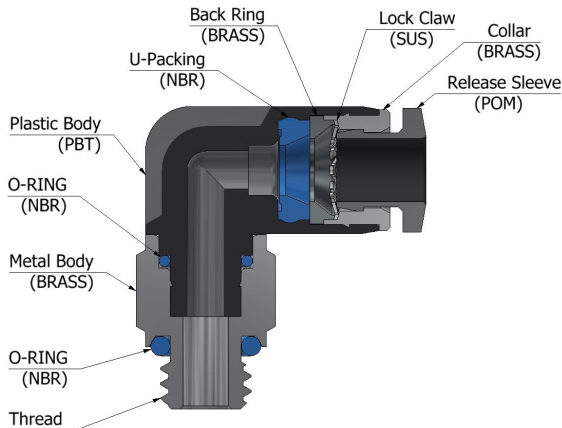


TPOC

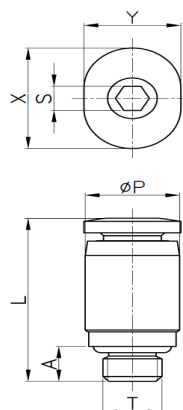


MODEL	ØD	ØP	T	L	A	B	H ^H (Hex)	X	Y
TPOC 06-M5C	6	10.0	M5*0.8p	18.6	3.6	12.7	2.5	12.4	10.2

TPL

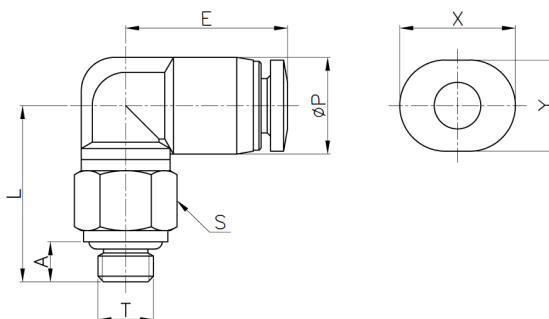


MODEL	ØP	T	L	E	A	S ^S (Hex)	X	Y
TPL 04-M3C	8.7	M3*0.5p	15.3	14.6	3.0	8	10.4	8.2
TPL 04-M5C	8.7	M5*0.8p	15.9	14.6	3.6	8	10.4	8.2
TPL 06-M5C	10.8	M5*0.8p	16.9	15.5	3.6	8	12.4	10.2

TPT

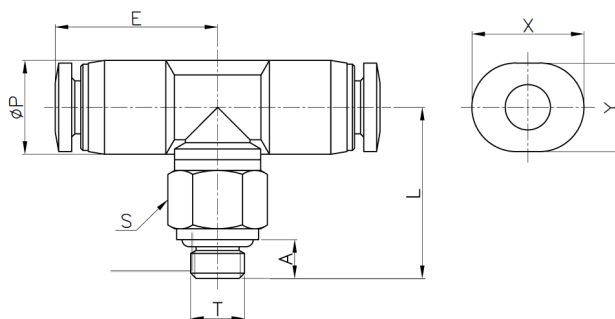


MODEL	ØP	T	L	E	A	S ^S (Hex)	X	Y
TPT 06-M5C	10.8	M5*0.8p	16.9	16.0	3.6	8	12.4	10.2


TPUC

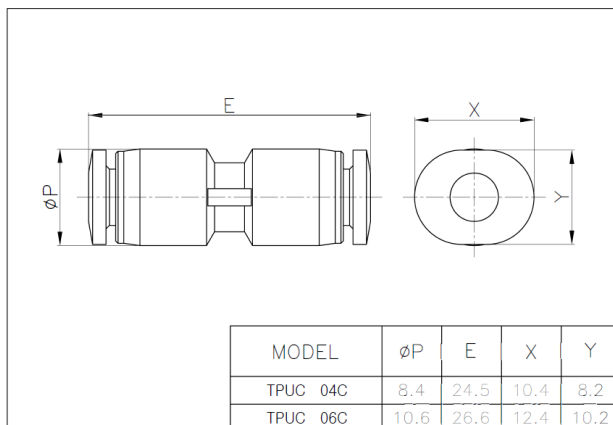


TPUL

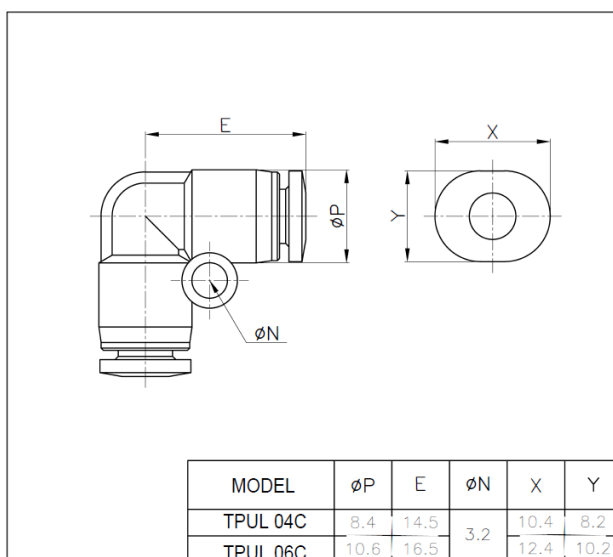


TPUT

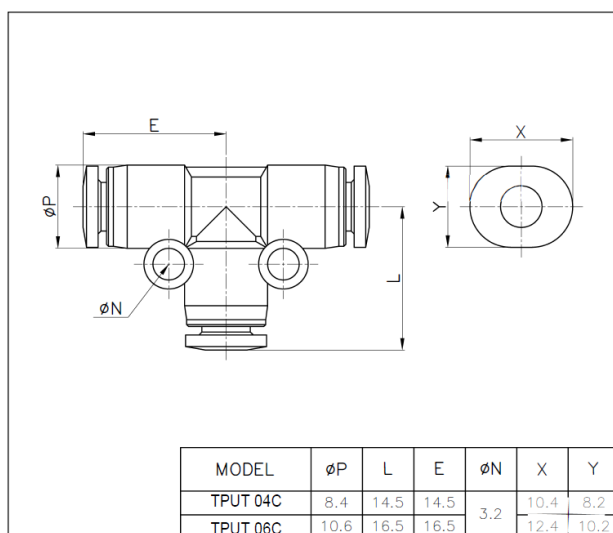


TPG

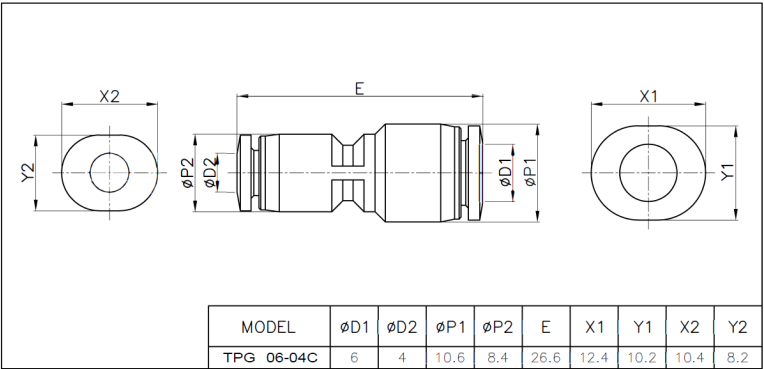


TPY

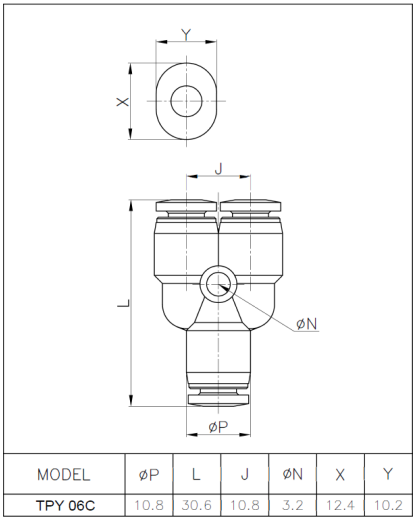

TPW

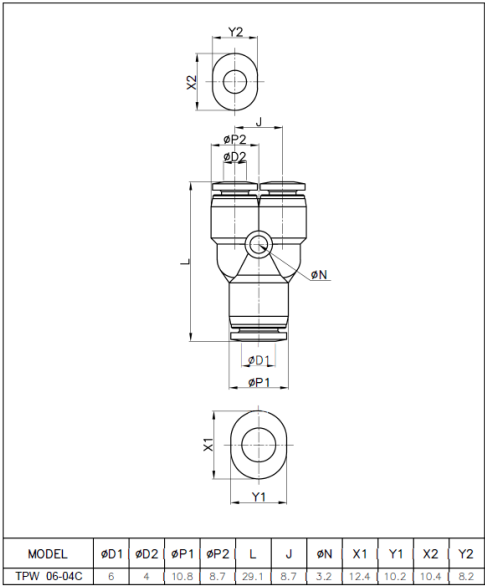

TPST

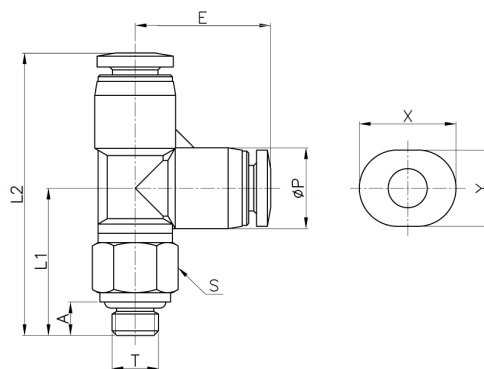

MODEL	ØP	T	L1	L2	E	A	S (Hex)	X	Y
TPST04-M3C	8.7	M3*0.5p	15.3	29.8	14.6	3.0	8	10.4	8.2
TPST06-M5C	10.8	M5*0.8p	16.9	33.4	16.5	3.6	8	12.4	10.2